




Malm Fireplaces

34 Zircon Gas Direct Vent



Malm 34 Zircon Gas Direct Vent

- Close clearance 2" to combustibles
- Available in real powder coat finishes
- Natural gas or Propane
- Safety screen
- Ceramic safety glass
- Proflame remote control
- Log set with glowing embers
- Variable speed blower
- Flame height adjustment control
- Standing pilot system
- Direct spark ignition
- Direct vent
- May be placed directly on combustibles
- Limited lifetime warranty
- Vertical & Horizontal Termination Approved
- Tested to ANSI Z21.88 2016

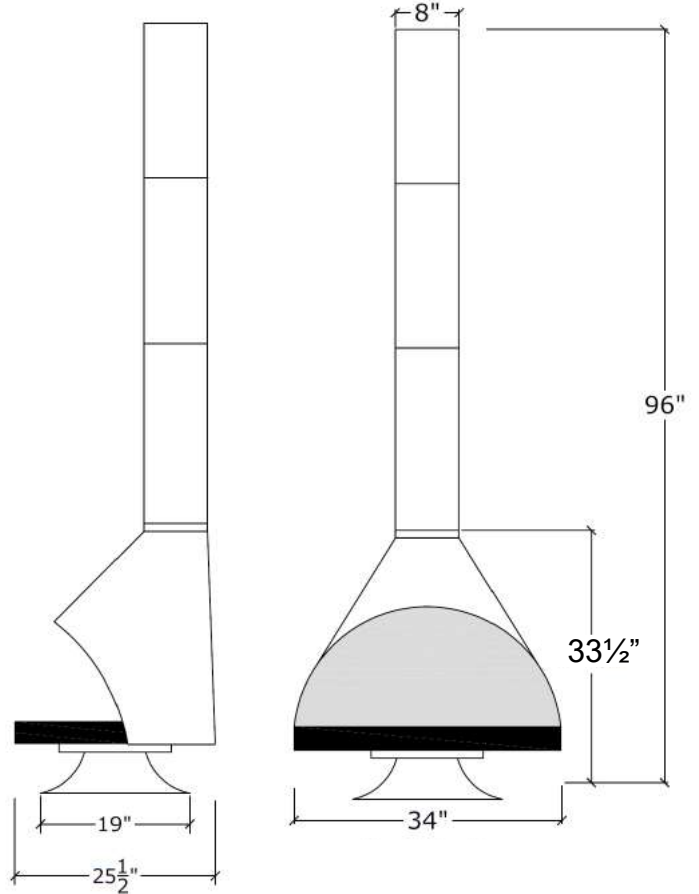


Horizontal installation center line is 68" from floor to center of support box. See installation Instructions.


Energy Specifications	NG	LP
Maximum BTU	23,500	21,500
Turn Down BTU	12,500	11,000
Efficiency (steady state)	73.94%	74.67%
EnerGuide Rating Canada	63.34%	64.73%

CLEARANCES to Combustible Walls

Sidewall and Back wall Installation

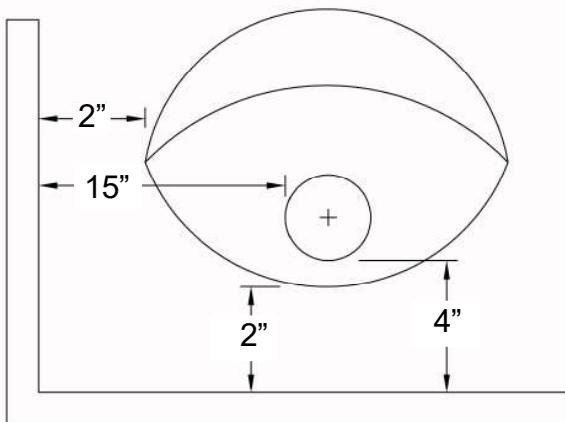

Corner Installation

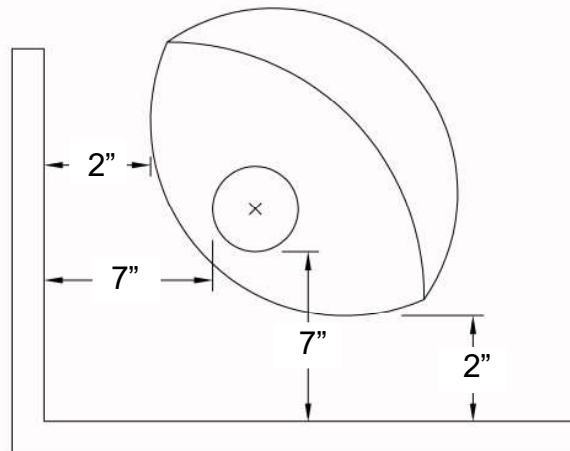

800 535-8955 - 707 523-7755

info@malmfireplaces.com www.malmfireplaces.com

Malm Fireplaces, Inc. - 368 Yolanda Ave. - Santa Rosa, Ca 95404